





PRIORITY


The Pate	ent Office		
Concept	House		
Cardiff I	Road		
Newport			
South W	alesc'd 30	SEP	2003
NP10 80)Q		2003
	WIPO		PCT

I, the undersigned, being an officer duly authorised in accordance with Section 74(1) and (4) of the Deregulation & Contracting Out Act 1994, to sign and issue certificates on behalf of the Comptroller-General, hereby certify that annexed hereto is a true copy of the documents as originally filed in connection with the patent application identified therein.

In accordance with the Patents (Companies Re-registration) Rules 1982, if a company named in this certificate and any accompanying documents has re-registered under the Companies Act 1980 with the same name as that with which it was registered immediately before reregistration save for the substitution as, or inclusion as, the last part of the name of the words "public limited company" or their equivalents in Welsh, references to the name of the company in this certificate and any accompanying documents shall be treated as references to the name with which it is so re-registered.

In accordance with the rules, the words "public limited company" may be replaced by p.l.c., plc, P.L.C. or PLC.

Re-registration under the Companies Act does not constitute a new legal entity but merely subjects the company to certain additional company law rules.



Signed

Dated

BEST AVAILABLE COPY


12 September 2003

An Executive Agency of the Denartment of Trade and Industri

Patents Form 1/77

Paleots Act 1977 (Pale 16)

this form)



23DEC02 E772810-2 D02246 P01/7700 0:00-0229777.8

The Patent Office

Cardiff Road Newport South Wales NP10 8QQ

Request for grain (See the notes on the back of this form. You can also get an explanatory leadlet from the Patent Office to help you fill in

b) there is an inventor who is not tramed as the

ci any named applicant is a corporate body.

See note (d))

Your reference P016023GB 0229777.8 DEC 2002 Parent application number (The Pateric Office will fill in this part) INTELLPROP LIMITED 3. Full name, address and postcode of the or of PO BOX 626 each applicant (underline all surnames) NATIONAL WESTMINSTER HOUSE LE TRUCHOT ST PETER PORT GUERNSEY Patents ADP number (If you know it) 6894604002 If the applicant is a corporate body, give the A GUERNSEY COMPANY country/state of its incorporation TELECOMMUNICATIONS SERVICES APPARATUS Title of the invention 5. Name of your agent (if you have one) D Young & Co "Address for service" in the United Kingdom 21 New Fetter Lane to which all correspondence should be sent London (including the postcode) EC4A IDA 59006 Patents ADP number (if you know it) Done of filing Priority application number 6. If you are declaring priority from one or more Country (day / month / year) (If you know it) earlier patent applications, give the country and the date of filing of the or of each of these earlier applications and (If you know in) the or each application number Date of liling Number of earlier application If this application is divided or otherwise (day i month i year) derived from an earlier UK application. give the number and the filing date of the earlier application Is a statement of inventorship and of right Yes to grant of a patent required in support of this request? (Answer Yes 75 a) any applicant named in part 3 is not an inventor, or

Patents Form 1/77

Patents Form 1/77

9. Enter the number of sheets for any of the following items you are filing with this form. Do not count copies of the same document

Continuation sheets of this form NONE

Description 12

Claim(s) 0

Abstract 0

Drawings 1 281

10. If you are also filing any of the following. state how many against each item.

Priority documents 0

Translations of priority documents 0

Statement of inventorship and right 2 to grant of a patent (Patents Form 7,'77)

Request for preliminary examination 0 and search (Pstents Form 9/77)

Request for substantive examination 0 (Patents Form 10/77)

(please specify)

Any other documents Facsimile Letter Dated 23 December 2002

I/We request the grant of a patent on the basis of this application.

Date 23.12.02

D Young & Co (Agents Yer the Applicants)

12. Name and daytime telephone number of person to contact in the United Kingdom

Adam Pilch

023 8071 9500

11.

After an application for a patent has been filed, the Comptroller of the Patent Office will consider whether publication ar communication of the invention should be prohibited or restricted under Section 22 of the Patents Act 1977. You will be informed if it is necessary to prohibit or restrict your invention in this way. Furthermore, if you live in the United Kingdom. Section 23 of the Patents Act 1977 stops you from applying for a patent abroad without first getting written permission from the Patent Office unless an application has been filed at least 6 weeks beforehand in the United Kingdom for a patent for the same invention and either no direction prohibiting publication or communication has been given. or any such direction has been revoked.

- if you need help to fill in this form or you have any questions, please contact the Patent Office on 08459 500505.
- b) Write your answers in capital letters using black ink or you may type them.
- If there is not enough space for all the relevant details on any part of this form, please continue on a separate sheer of paper and write "see continuation sheet" in the relevant part(s). Any continuation sheet should be attached to this form.
- d) If you have answered 'Yes' Patents Form 7/77 will need to be filed.
- e) Once you have filled in the form you must remember to sign and date it.
- f) For details of the fee and ways to pay please contact the Patent Office.

Patents Form 1/77

TELECOMMUNICATIONS SERVICES APPARATUS

Text Messaging is established as a popular and effective means of communication for users of mobile telephones. The Short Message Services (SMS) of the GSM mobile telephony system provide an example of such a text messaging facility, and support for the composition, transmission and reception of Short Messages is present in the majority of GSM mobile terminals. SMS text messaging requires alphanumeric entry using the standardised Man Machine Interface (MMI) of the mobile handset, and also requires that the message be addressed to the desired recipient. Other forms of text messaging include EMS (Enhanced Messaging Service). MMS (Multimedia Messaging Service) and all such forms of text messaging are inclusively referred to be the term text messaging for the remainder of this document.

5

10

15

20

25

30

The destination address for a text message may typically be specified either by entering a Mobile Station ISDN number (MSISDN) that is the mobile telephone number of a desired recipient, or by selecting an entry from the handset's address book that already has the desired MSISDN or other address pre-programmed in. The address book normally provides the address by using alphanumeric look-up of a name.

The text messaging mechanism was originally defined for voice mail alerts in the form of SMS, and was extended to mobile-to-mobile text messaging, and later used for communication between mobiles and fixed entities in the network known as SMS Hosts. SMS Hosts are typically used for receiving the results of SMS voting events, or transmitting messages such as football results in bulk to users who subscriber to a premium service for example. SMS Hosts are responsible for an increasing proportion of SMS traffic.

One of the features of text messaging is that an identifier corresponding to the sender's identity is normally transmitted to the recipient. For example, in the GSM Short Message Service (SMS) it may not normally be optionally withheld by the sender. Exceptions to this include certain specialised services which may be offered by an operator, such as chat or dating whereby an alternative or temporary CLI is presented to the recipient.

permitting reply but obscuring the originator's identity. Apart from such exceptions, the Calling Line Identity (CLI) is normally sent and may be displayed in the form of an MSISDN, though most handsets will translate this to an alphanumeric name if there is a corresponding MSISDN entry in the handset's address book. This provides ease of recognition of the sender, without the recipient having to remember telephone numbers.

The mobile-CLI feature is analogous to the-CLI facility available on fixed networks. Another benefit of receiving CLI is that a reply to the message is more easily achieved without having to explicitly specify the return address. The MMI for mobile handsets in GSM defines Reply as a standard feature.

10

15

20

25

30

As an alternative to transmission of the CLI identifier as an MSISDN, the GSM system also supports, for mobile terminated messages, the transmission of a short Alphanumeric value or name of up to 11 characters instead. Support for reception and correct display of an Alphanumeric CLI is widely available on recent mobile telephones. This facility is being used increasingly by SMS Hosts to brand the messages that are sent to subscribers. In most cases, telephone numbers associated with SMS Hosts or companies originating brand-related SMS traffic would not be pre-programmed into recipients' handsets. The CLI of such messages would therefore carry no value to the user in promoting or recognising the identity of the message source. By using an alphanumeric CLI (such as 'Coca-Cola' or 'Hertz') the user is immediately able to recognise the source, instead of receiving a message from an unrecognised number.

By using the built-in reply function, most handsets are able to reply to a message that had an alphanumeric CLL although in most cases the network will not support delivery of such a reply message. In this case, the alphanumeric address becomes the destination address of the reply message.

In many cases, handsets are also able to originate messages with an alphanumeric destination address, and as services that make use of alphanumeric addresses increase in popularity it is likely that handset manufacturers will also improve the MMI in this area.

Prior art allows a mobile subscriber to send a text message from a mobile handset and have the message delivered as an email to a specified email address. However the syntax for specifying the email address on the mobile handset is cumbersome and slow, and hence the facility when offered by a network is relatively little used. A further disadvantage of this arrangement is that the user must know in advance the desired destination email address. Although the domain name of many companies can be guessed, the complete email address of a company department that is able to handle messages or queries sent by email is generally not guessable.

٦,

An additional complexity of such SMS to email services is that the reply path requires a correlation mechanism. When a message is originated from an email address and delivered to a mobile telephone, it is desirable that the mobile user should be able to reply to the sender using the SMS Reply function of the handset's MMI. To do this the CLI field of the original message delivered to the handset must contain a valid reply address. Since this can be either an MSISDN number or an 11 character alphanumeric string, it is not generally possible to directly store an email address there since it would usually be too long. Consequently the network must maintain a correlation mechanism. A special CLI value is generated and sent to the mobile handset with the message. The network stores the CLI value and the corresponding sender's email address. When the user replies, the special CLI is used as the destination address. This address causes the text message to be directed to the network's SMS-to-email gateway, where the corresponding destination email address is looked up and substituted.

A further shortcoming of current SMS addressing means is that it is not generally possible to call someone's mobile telephone number if you do not know it, even though you may know their company name and extension number. VPN services allow this but only if the caller belongs to the same closed user group. People within the same company VPN may call each other using short numbers, but outsiders cannot make use of this facility.

30

5

10

15

20

The present invention solves both of these problems, allowing short-form specification of both certain classes of email addresses and VPN numbers for certain companies, using only the 11 character field available in an alphanumeric destination address.

For the email address case, it may be observed that there are a limited number of service providers that have achieved mass-market penetration, such that their email domain names are immediately recognisable by people who regularly use email. Examples include hotmail.com, yahoo.com, aol.com and others. Consequently, useful compression of the email address may be obtained by representing one or more of these common providers as shortform part of an alphanumeric address that may be entered on a mobile telephone.

In an embodiment, the exemplified service providers might be represented as follows:

Service provider email domain	Possible shortform
@Hotmail.com	<pre><partial address="" ending="" with=""> @</partial></pre>
@Yahoo.com	<pre><pre>partial address ending with>@y</pre></pre>
@Aol.com	< partial address ending with>@a

Using these examples, a mobile phone user would be able to send an email message to a destination email address jsmith@hotmail .com simply by sending a text message to the alpha address

jsmith@

5

10

The suffix @ would be recognised by the network as a shortform for @hotmail.com. The alphanumeric address would be translated by the network to a destination email address jsmith@hotmail.com. and the message delivered by email. The prefix (in this case jsmith) could currently be up to 10 characters long maximum, although furme standardisation work may lead to enhanced alphanumeric capabilities in GSM and other mobile network technologies.

It is also possible to define the absence of a suffix, or the absence one of a set of suffices.

15 to indicate a particular short form representation. For example the absence of the such a suffix could be defined as indicating part of a Hotmail address:

Service provider email domain	Possible shortform
@Hotmail.com	<pre>< partial address ending with no suffix></pre>

Using this example, a mobile phone user would be able to send an email message to a destination email address jsmith@hotmail.com simply by sending a text message to the alpha address

jsmith and the prefix (in this case jsmith) could currently be up to 11 characters long.

5

10

15

In a further embodiment, telephone numbers (fixed or mobile) may be represented as a ... shortform. A different character from '@' may be used (e.g. '!') to indicate that the shortform should be translated to a telephone number rather than an email address. In this case instead of a domain name, a company name is preferably used as exemplified in the following table:

Сощрану наше	Possible shortform
Vodafone	!vf
Telsis	lt .

The desired destination number may then be reached by addressing a text message to either the person's company extension number, or some representation of their name such as their initials. Examples are given in the following table illustrative possible ways to use this type of technique, but other variants are possible.

Short form Alphanumeric address	Network translates to	Comments
4410!vf	07890 123456	Telephone number of person at Vodafone whose extension number is 4410
abe!t	07803 760123	Telephone number of A B Clarke at Telsis Ltd

20 Extension numbers and peoples' initials are generally 4 characters or less, while alpha addresses support up to 11 characters. This leaves 7 characters for the ! or @ plus the abbreviation of the company name.

5

10

15

20

25

30

Where a duplicate short form or ambiguity exists, for example due to two people in the same company having the same initials, the system could return a text message to the originator listing additional unambiguous short forms and their translations, allowing the user to try again.

It is also possible to apply the techniques described to numeric as well as alphanumeric addresses. For example the short form address 123* is enterable and accepted on most phones as a numeric address. This could be used as a short form to represent a full address, which might be a telephone number, an email address, or the like.

The methods so far presented may be combined, so that for example, both email address and /or telephone numbers may be stored against short form alphanumeric addresses in the network database. The user could choose the delivery address and medium by, for example, choosing to use @ or ! in the short form address, meaning email or text message respectively. The system could default to using an alternative address and medium of delivery if the requested one was not available.

Key advantages of the invention over the prior art are that text messages or emails may be sent to colleagues in the same or another organisation without the user having to know a full email address or telephone number of the person. No correlation mechanism for replies to email is required in the network, and so no unique address range needs to be reserved for generating CLIs for this purpose.

Other possibilities exist for message destinations that may be specified indirectly as described, using an alphanumeric address that does not exceed 11 characters. For example one could envisage sending a message to a car registration number to report a problem or to make contact with a driver. In the UK, registration numbers are a maximum of 7 characters long, containing both letters and numbers. One may conceive of services, perhaps aimed at drivers, where the participant provides a registration number as a means of entry into a competition or other event. The service provider then has the means to tie up the registration number with other contact details provided such

as a name and address, thereby forming a database. The service provider can then offer services whereby such registered participants are contactable for other purposes by means of messages sent to their registration number.

5

10

15

20

Referring to Figure 1. the user of a mobile telephone is connected to a mobile network -via an MSC-[1].-Short messages originated by the user-pass through an SMS router [2] or equivalent means for diverting certain messages. The SMS Router identifies certain messages according to their characteristics, and routes these messages to a Message Processing means [3]. Other messages follow the normal path through the network and are delivered either directly to a destination MSC [7] or via an SMSC [4] for store and forward delivery. The message processing means is operable to generate a response message, which is delivered back to the originator via the SMS Router. If immediate delivery of the response is not possible, the message may be passed from the SMS Router to the SMSC for store and forward delivery. Alternatively the message processing means is operable to send the processed message via an email gateway [5] where the message is converted to email format and delivered via an email network to the recipient email system [6]. The recipient email system may generate an email reply, in which case this is delivered via the email gateway, which converts the reply to SMS format and passes it to the Message Processing means. The reply is then delivered to the originator either directly via the SMS Router, or by a store and forward method using the SMSC.

The operation of the invention is now described in detail by means of a specific example.

In this example recipients on the ubiquitous 'Hotmail' Internet based email system are made reachable from any GSM mobile telephone network by means of text messages sent to an alphanumeric address ending in '@'. Other characters or syntaxes are possible. Although presently there is a restriction of 11 characters in GSM for alphanumeric addresses. leaving 10 plus @ for the Hotmail address prefix, this is sufficient for a majority of Hotmail account names. With in-excess of 6 million billion possible addresses formable from 10 characters, there is plenty of scope yet for new addresses to be created that are also suitable for use with this invention.

Furthermore the email recipient is able to reply to the message, and have the reply delivered back to the originating mobile telephone as a text message.

In the following example. a GSM mobile telephone user with telephone number 07123 123456 wishes to send an email message from his mobile telephone to Hotmail user zcbmligd27@hotmail.com.

5

10

15

20

25

30

Using SMS, the sender composes his message, and sends it in the normal way, but specifying an alphanumeric destination address. This is achievable on most Nokia phones by using 'Send by Set', or 'Send Options' then choosing a profile, and subsequently selecting 'Alphanumeric'. Methods vary on other types of phone.

The alphanumeric address zcbmljgd27@ is then entered and the message sent.

The network is configured so that the message passes through an SMS Router (2) en route to the SMSC. This configuration is normally achieved by assigning the global title of the SMSC s to the SMS Routers, thereby causing all MSCs to direct mobile originated (MO) text messages to an SMS Router.

The SMS Router examines each message, and on determining that the address is formatted with an alphanumeric Type of Address, passes the message to the Message Processing means (3).

The Message Processing means determines that in this case the particular destination address indicates that the message is to be delivered by email to a Hotmail address. This determination may be made by means of an algorithm, a lookup table, a database or other means that recognises that the syntax of an alphanumeric address ending with '@' signifies a Hotmail destination. The Message Processing means also determines the new origination address and destination email address to be used.

A new origination address is required in order to ensure that any reply returns via a desired route, which in this example is back through the Message Processing means. In this example the new origination address is created by including the user's CLI (07123)

123456) along with an email domain name corresponding to the email gateway. forming the address

07123123456@<EMAILGATEWAYDOMAIN.COM>

Many other suitable forms of address are possible.

5

10

A new destination address is required in order to deliver the message to the appropriate-Hotmail address. Characteristics of the desired destination address may be algorithmically derived or looked up in a table or database using the original destination address zcbmljgd270. In this example the new destination address is zcbmljgd270hotmail.com.

The message is now passed to the email gateway [5] where it is converted to email format and delivered via an email network to the recipient email system [6].

15 The message properties at this point are—

Originating address	071231234566 <emailgatewaydomain.com></emailgatewaydomain.com>	
Destination address	zcbmljgd27@hotmail.com	
Content	Are you coming to the party tonight?	
Format	Email	

The primary purpose of the invention has now been demonstrated, which is to allow a user to deliver a message to an appropriate email address using only a text message to an abbreviated Hotmail address. Furthermore, the CLI of the sender is now available to the recipient.

20

25

The secondary purpose of the invention is to permit a reply. or origination, path from recipients back to mobile subscribers. Using a reply to the previous case as an example, this works as follows.

The reply may be sent using the normal reply facilities of standard email systems, whereby the origination address of a message is automatically used as the default reply address.

The reply properties at this point are-

Originating address	zcbmljgd27@hotmail.com	
Destination address	07123123456@ <emailgatewaydomain.com></emailgatewaydomain.com>	
Content	Yes, I'll be there.	
Format	Email	

This message arrives at the email gateway [5], is converted to text message format and passed to the Message Processing means [3]. The message addresses are then further transformed to be appropriate for the mobile telephone network, and to permit further reply by the user.

The user's telephone number is extracted from the email destination address.

10 The reply properties at this point are—

•	•

zcbmljgd270 is returned as the alphanumeric CLI of the reply, so that the user can easily send a further response.

15 Security issues are important for an email reply path, as with all systems that allow SMS messages to be initiated from the Internet. It is desirable for the mobile network operator to be able authenticate traffic with a source address indicating a domain name of Hotmail for example as genuinely originating from there. It is also desirable to be able to block unauthorised traffic from the Internet from obtaining access to mobile subscribers via the apparatus. Known prior art techniques such as Digital signatures can be employed to provide the desired level of security. Using such techniques the mobile network is able to control and police the access to the apparatus. If desired, traffic arriving at the gateway may be restricted to replies to previously originated messages from mobiles. or

alternatively, particular destinations may be allowed also to originate messages to subscribers.

1/1

LJ. ULV. EUUE 1V.JJ

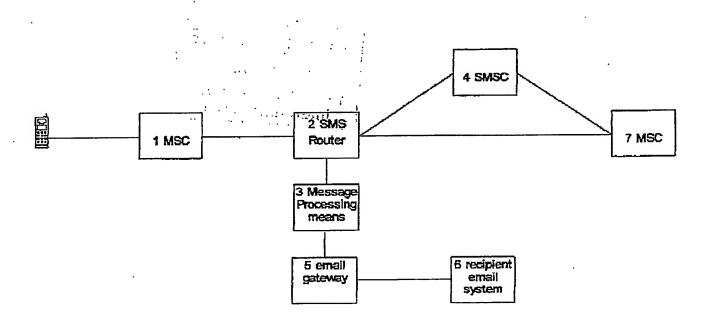


Figure 1

THE PATENT OFFICE 15 SEP 2003 Received in Patents International Unit

This Page is Inserted by IFW Indexing and Scanning Operations and is not part of the Official Record

BEST AVAILABLE IMAGES

Defective images within this document are accurate representations of the original documents submitted by the applicant.

Defects in the images include but are not limited to the items checked:

BLACK BORDERS
☐ IMAGE CUT OFF AT TOP, BOTTOM OR SIDES
FADED TEXT OR DRAWING
BLURRED OR ILLEGIBLE TEXT OR DRAWING
☐ SKEWED/SLANTED IMAGES
☐ COLOR OR BLACK AND WHITE PHOTOGRAPHS
☐ GRAY SCALE DOCUMENTS
LINES OR MARKS ON ORIGINAL DOCUMENT
☐ REFERENCE(S) OR EXHIBIT(S) SUBMITTED ARE POOR QUALITY
□ OTHER:

IMAGES ARE BEST AVAILABLE COPY.

As rescanning these documents will not correct the image problems checked, please do not report these problems to the IFW Image Problem Mailbox.